



TRIM ROAD REALIGNMENT & ST. JOSEPH BOULEVARD & OLD MONTREAL ROAD WIDENING

LANDSCAPING PLAN
20+050 - 20+600

Contract No. **ISD11-5147** Dwg. No. **L12**

Asset No. _____

Asset Group _____

Z. Ghabban, P. Eng. **Robinson Consultants**
Manager
Design & Construction - Municipal East

J. Mojszej, P. Eng. **GENIVAR**
Project Manager
Design & Construction - Municipal East


ASSOCIATION OF LANDSCAPE ARCHITECTS' ONTARIO
OALA
SEPT 21, 2012

Des. Chk'd. **KD**
Dwn. Chk'd. **KD**
Utility Circ. No. _____ Index No. _____
Const. Inspector _____

Scale: **HORIZONTAL** 0m 5 10 20
VERTICAL 0m 1 2

NOTE: The location of utilities is approximate only, the exact location should be determined by consulting the municipal authorities and utility companies concerned. The contractor shall prove the location of utilities and shall be responsible for adequate protection from damage.

No.	Description	By	Date (dd/mm/yy)
1	ISSUED FOR REVIEW	KD	25/05/12
2	ISSUED FOR TENDER	KD	29/06/12
3	ISSUED FOR CONSTRUCTION	KD	21/09/12

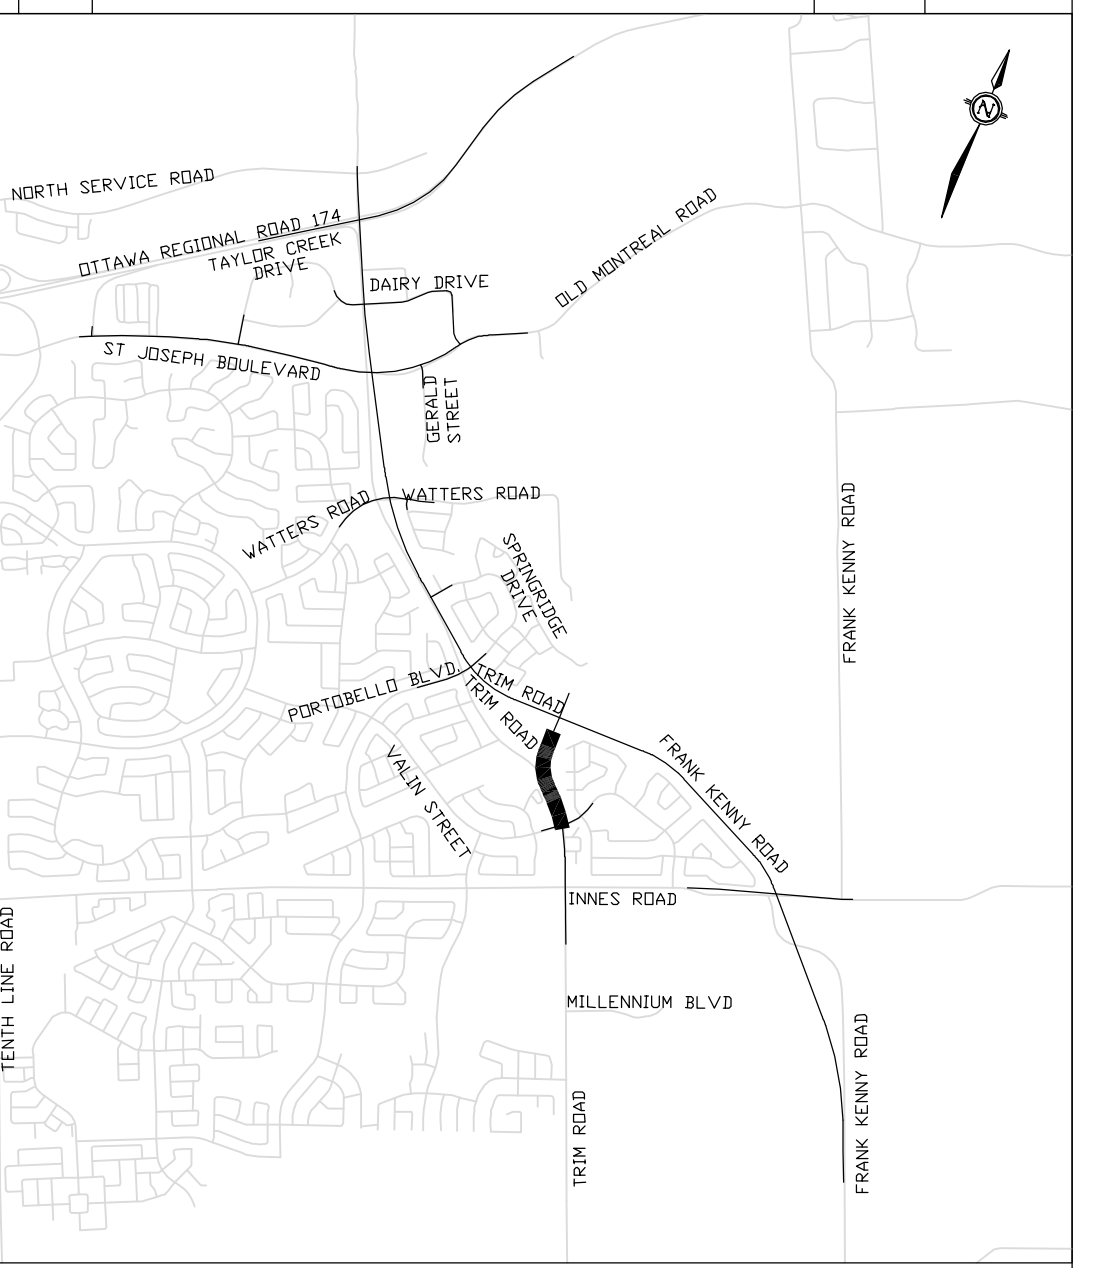

- NOTES:**
- ALL SITE INFORMATION SHOWN COMPILED FROM EXISTING MAPS. ALL DIMENSIONS MUST BE VERIFIED ON SITE AND REPORT ALL DISCREPANCIES.
 - CONTRACTOR TO VERIFY LOCATION OF ALL SUBSURFACE SITE SERVICES PRIOR TO ANY EXCAVATION. CONTRACTOR TO REPAIR ALL DAMAGES AT NO COST TO OWNER(S).
 - REINSTATE ALL AREAS DAMAGED BY CONTRACTOR OUTSIDE DESIGNATED WORK AREAS.
 - ALL GRADED AREAS TO RECEIVE 100 mm TOPSOIL, SEED & MULCH UNLESS OTHERWISE SPECIFIED.
 - ALL EARTH FILL TO BE COMPACTED TO 95% MAX. DRY DENSITY
 - ALL SLOPES TO REMAIN WITHIN R.O.W. UNLESS OTHERWISE NOTED.
 - EXCAVATION FOR TREES/SHRUBS TO BE INCLUDED IN THE UNIT PRICE BID FOR SUPPLY AND INSULATION OF TREES/SHRUBS.
 - ALL MEASUREMENTS ARE IN METERS UNLESS OTHERWISE SHOWN.
 - PROTECT EXISTING TREES TO REMAIN.

ISSUED FOR CONSTRUCTION

ID: Y:\2010 Projects\101-17549-00 - Trim Road Realignment\Tech\DWG\Landscaping\L1.L17.dwg - Thu, 20 Sep 2012 - 11:01