

TRIM ROAD REALIGNMENT & ST. JOSEPH BOULEVARD & OLD MONTREAL ROAD WIDENING




LANDSCAPING PLAN
11+525 - 12+100

Contract No. **ISD11-5147** Dwg. No. **L4**

Z. Ghadban, P. Eng. *Manager*
Design & Construction - Municipal East

J. Mojsiej, P. Eng. *Project Manager*
Design & Construction - Municipal East

Robinson Consultants **GENIVAR**

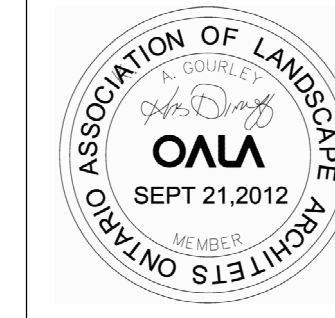

Asset No. _____

Asset Group _____

Des. **KD** Chkd. **KD**

Dwn. **MF** Chkd. **KD**


Utility Circ. No. _____ Index No. _____

Const. Inspector _____

Scale: **HORIZONTAL** 1:20
0m 5 10
VERTICAL 1:2

NOTE: The location of utilities is approximate only, the exact location should be determined by consulting the municipal authorities and utility companies concerned. The contractor shall prove the location of utilities and shall be responsible for adequate protection from damage.

| No. | Description | By | Date (dd/mm/yyyy) |
|-----|-------------------------|----|-------------------|
| 1 | ISSUED FOR REVIEW | KD | 25/05/12 |
| 2 | ISSUED FOR TENDER | KD | 29/06/12 |
| 3 | ISSUED FOR CONSTRUCTION | KD | 21/09/12 |

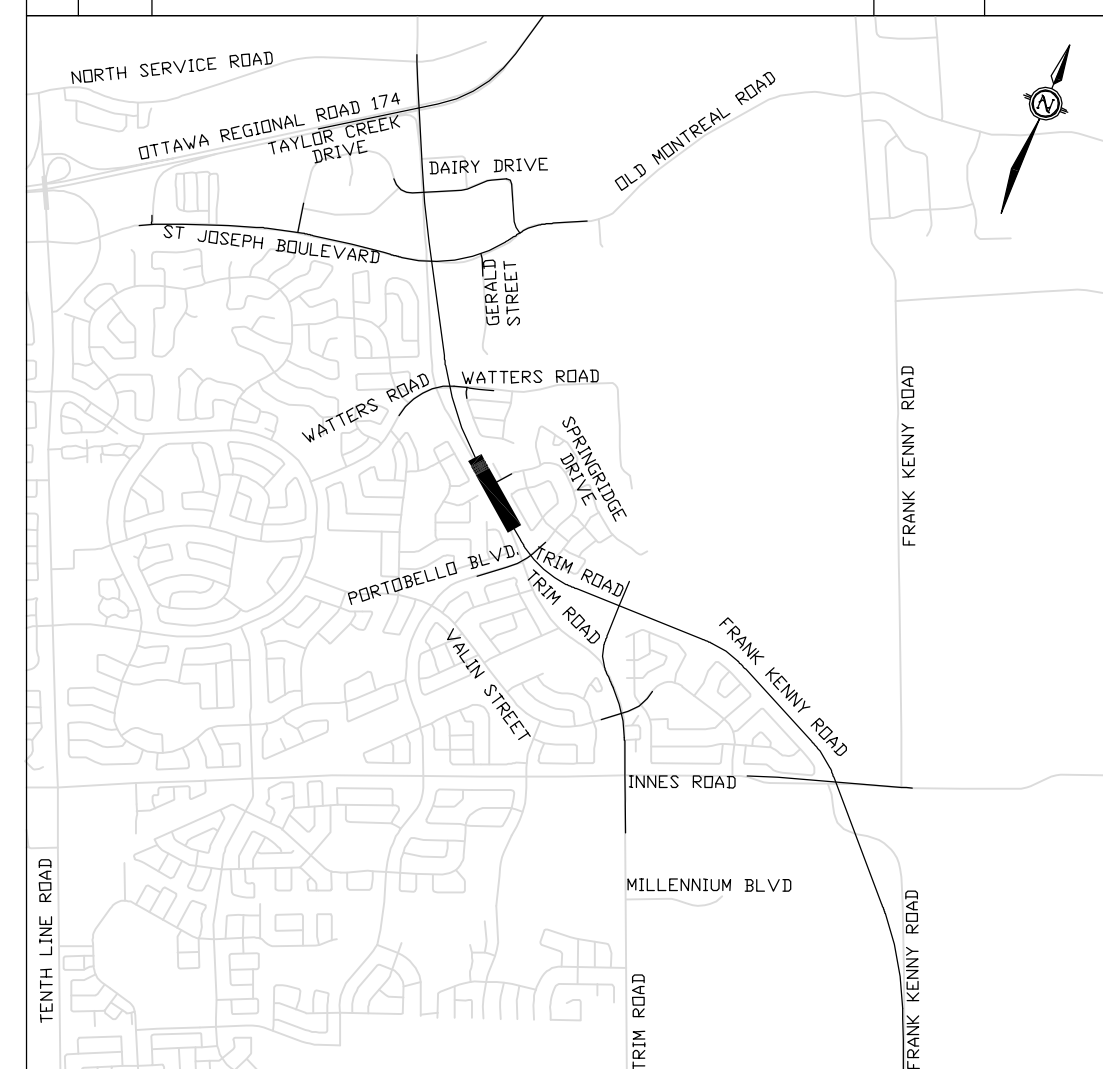


PROPOSED LANDSCAPING

REFER TO SHEET 17:

- Woodland Plantings
- Deciduous Tree Plantings
- Coniferous Tree Plantings
- Shrub Mass Plantings
- Stormwater Management Landscaping - Pond Perimeter
- Unit Pavers

- NOTES:**
- ALL SITE INFORMATION SHOWN COMPILED FROM EXISTING MAPS. ALL DIMENSIONS MUST BE VERIFIED ON SITE AND REPORT ALL DISCREPANCIES.
 - CONTRACTOR TO VERIFY LOCATION OF ALL SUBSURFACE SITE SERVICES PRIOR TO ANY EXCAVATION. CONTRACTOR TO REPAIR ALL DAMAGES AT NO COST TO OWNER(S).
 - REINSTATE ALL AREAS DAMAGED BY CONTRACTOR OUTSIDE DESIGNATED WORK AREAS.
 - ALL GRADED AREAS TO RECEIVE 100 mm TOPSOIL. SEED & MULCH UNLESS OTHERWISE SPECIFIED.
 - ALL EARTH FILL TO BE COMPACTED TO 95% MAX. DRY DENSITY
 - ALL SLOPES TO REMAIN WITHIN R.O.W. UNLESS OTHERWISE NOTED.
 - EXCAVATION FOR TREES/SHRUBS TO BE INCLUDED IN THE UNIT PRICE BID FOR SUPPLY AND INSULATION OF TREES/SHRUBS.
 - ALL MEASUREMENTS ARE IN METERS UNLESS OTHERWISE SHOWN.
 - PROTECT EXISTING TREES TO REMAIN.

ISSUED FOR CONSTRUCTION

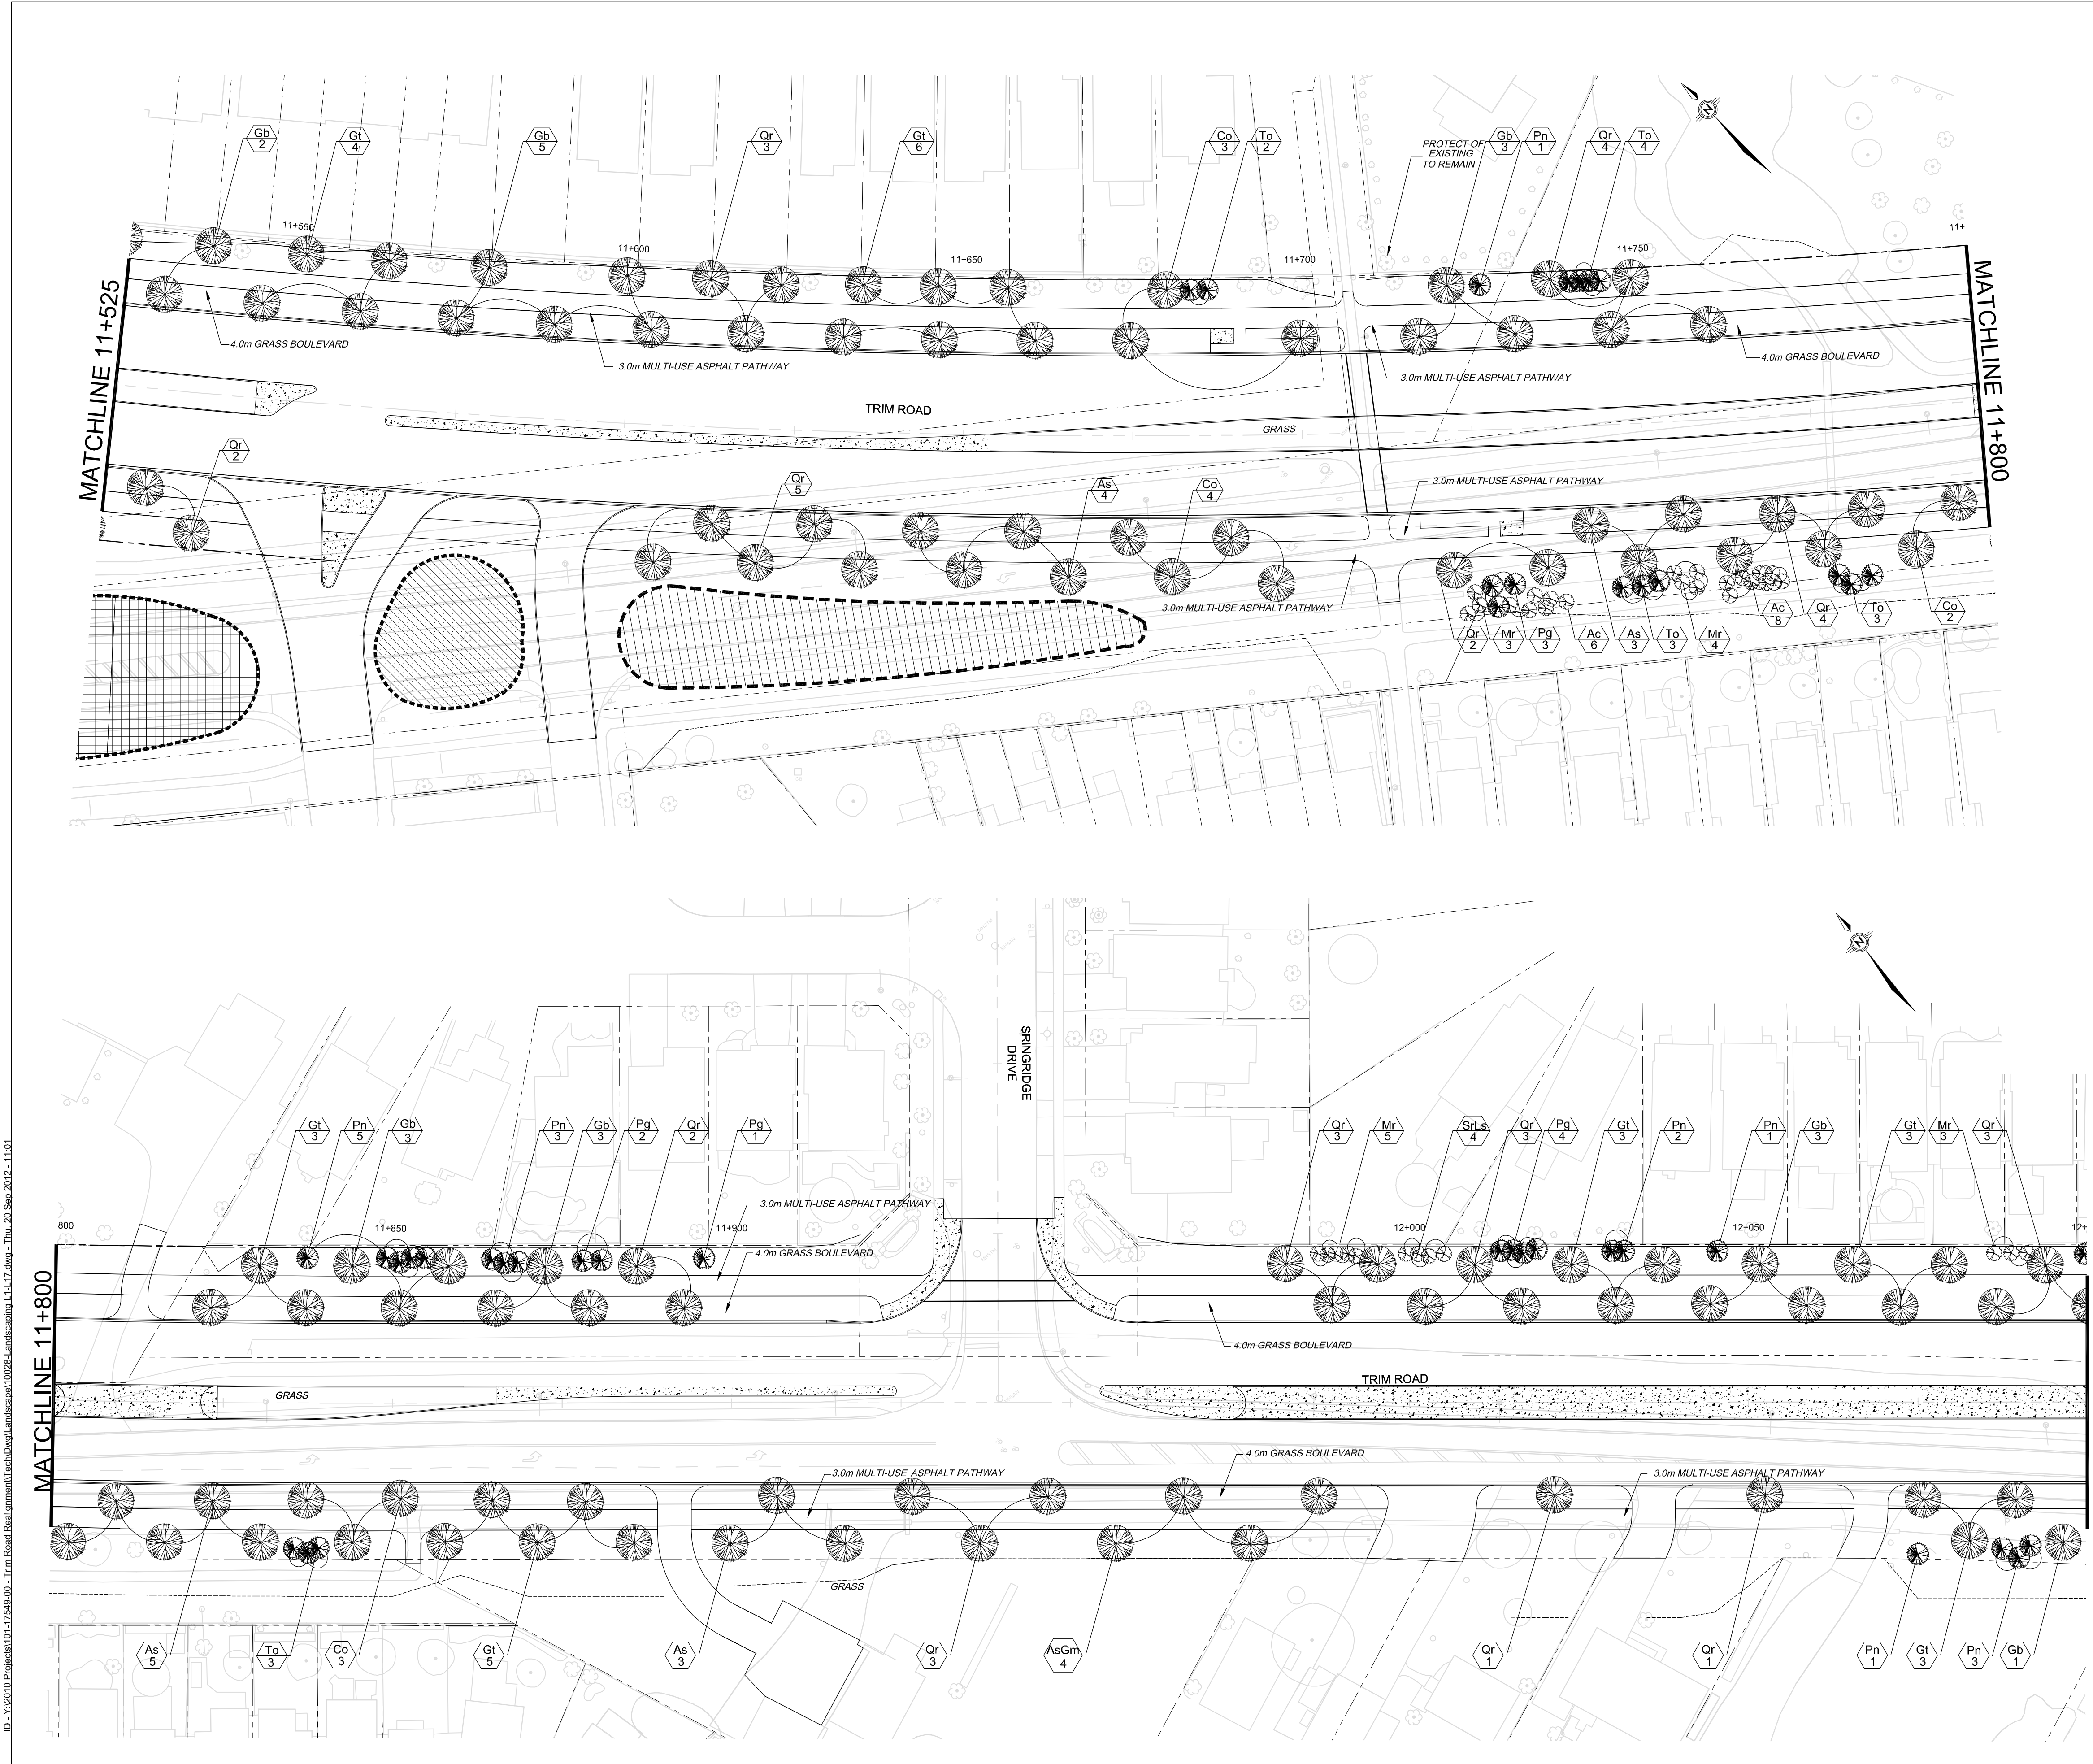

ID: \\C:\2010\Projects\101-17549-00 - Trim Road Realignment\Tech\Drawings\Landscaping\100282_Landscaping_L4.L4.dwg - Thu, 20 Sep 2012 - 11:01